

## Mounting instructions.

### SWITCH OFF ELECTRICITY BEFORE MOUNTING!!!!!!!!!!!!

Mark-off the inbetween-distance of the hanging wires. 30,5cm and prepare the holes for hanging points. (1.)

Fix the hangingpoints to the ceiling with a plug and screw as said in the drawing! (2.)

Fix the plaque to the ceiling where the main entrance of 220/230V is.(3.)


Push the steelwires through the hangingpoints at the ceiling and make sure they get blocked. (2+4.)

Now four wires are hanging on the ceiling. Check all the fixtures that they are turned tight and that the wires are blocked when pulling them!

When the frame is hanging.

- Define the length of the main wiring.

- Connect the 220V /230V wiring. Beginning with the ground lead, then connect the main wiring to the electrical terminal.(5.) All the 12V electricity is hidden in the cap on top of the suspension.

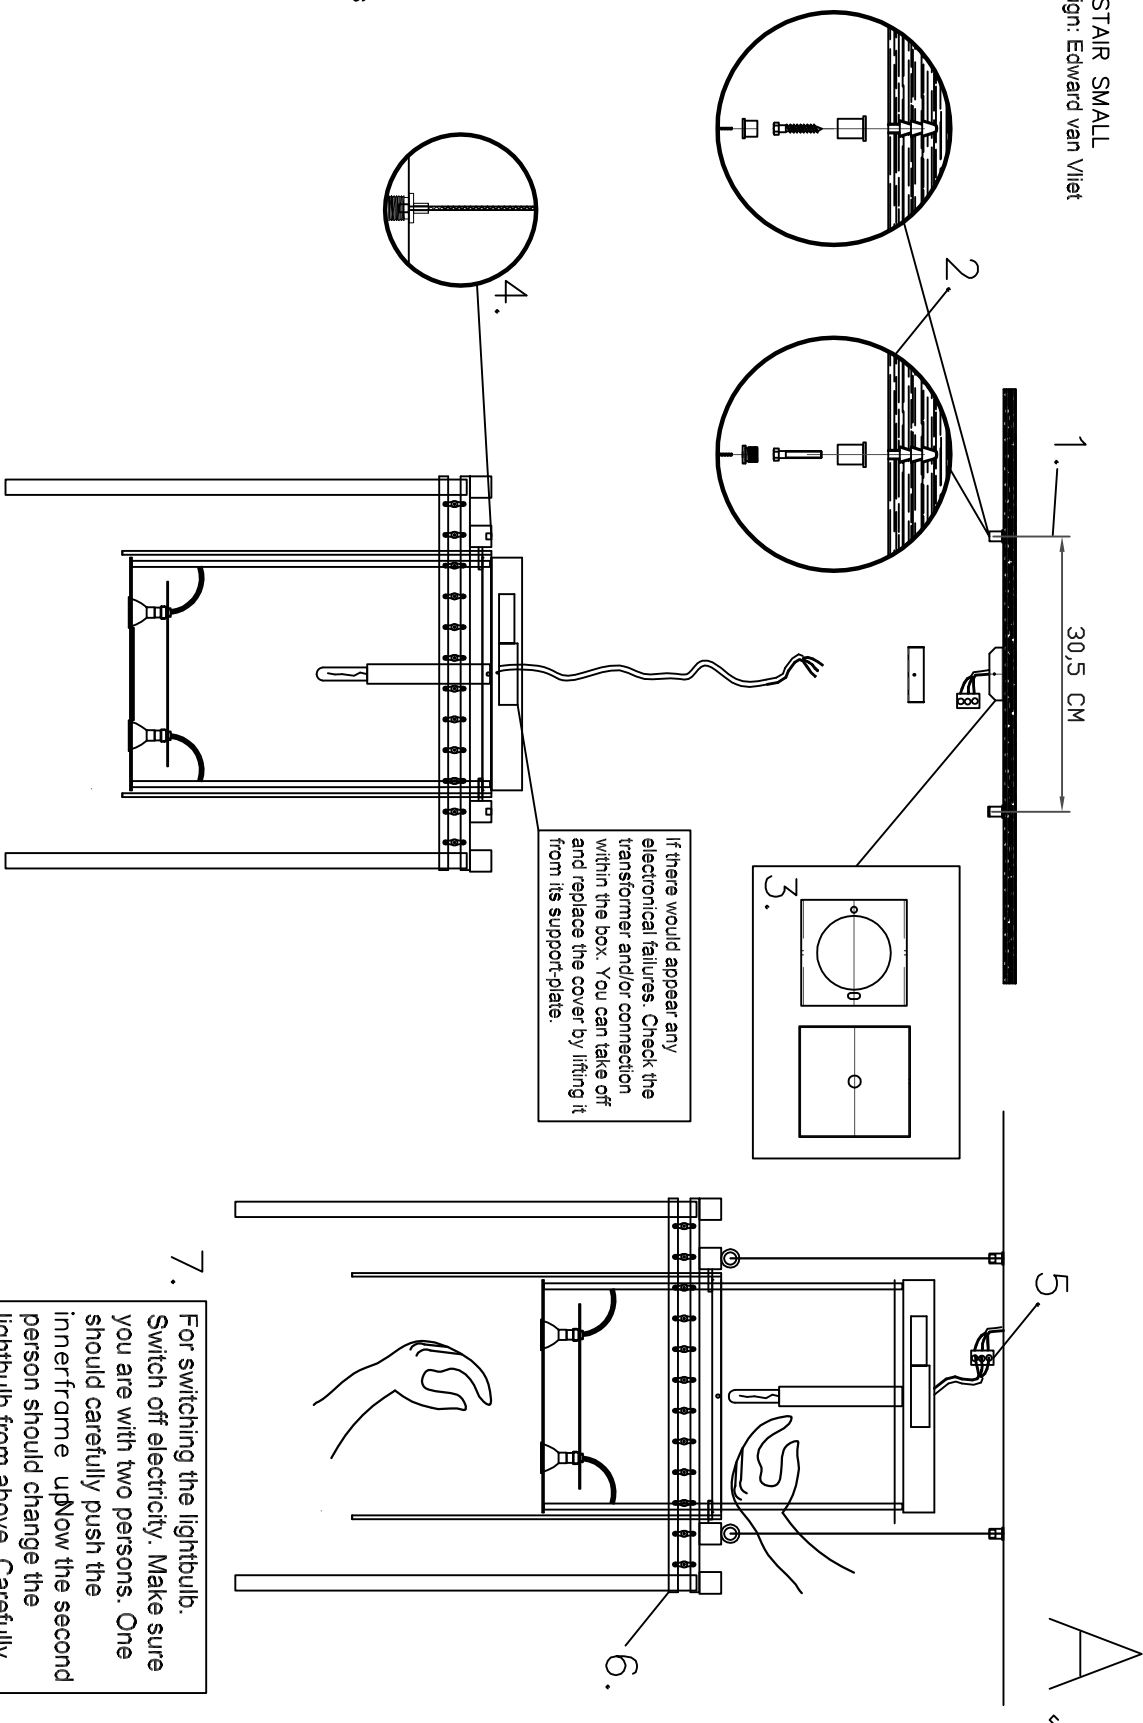


When finished the

connection make sure you close the applique (3.) by turning tight the inserts on the sides and turn tight the cable-grip.

SEE DRAWING B.

6. Move the tubes towards the frame and hang them in every hook.

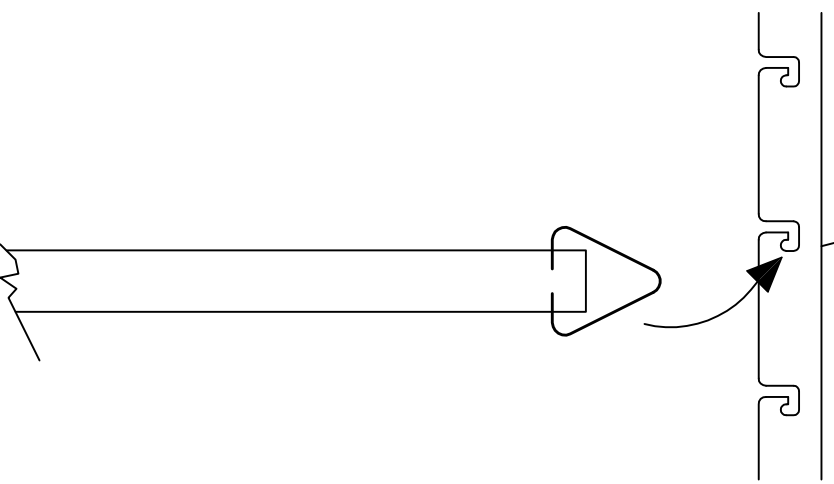


ALISTAIR SMALL  
PRODUCT INFORMATION:


B  
↙

- Lightsources:  
With each ALISTAIR you will receive:
- 4 x 20W halogen 12V.
  - 28+3 X E10/1,2W lightbulb 12V.
  - 1 x GY 6.35 / 35W halogen. 12V.

The transformers are positioned as followed on top of the frame. Just lift the aluminium cap.



Always switch off the light before cleaning!!!  
Clean the suspension with a featherduster or a specified cleanser on soft cloth.

**CE** certification of european conformity  
 classified fittings whose safety is guaranteed by the earth connection