




CITADEL SINGLE

SUSPENDED LAMP

by Jan Pauwels

The circle of light. The easy to order single version of Citadel. During installation you can choose whether the rings will be perfectly horizontal or in a more inclined way. The suspension cables will also pass the current. Leading and trailing edge dimmable

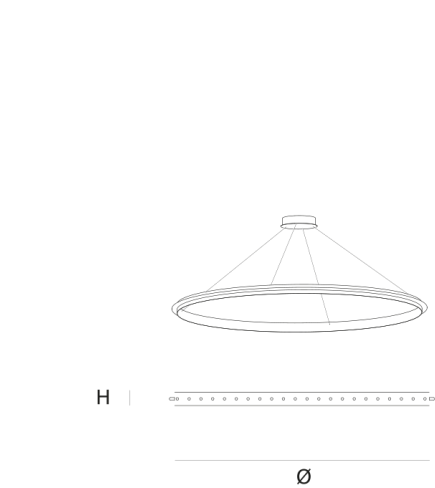

| DIMENSIONS  |                  | LIGHTSOURCE   | FINISH     | TYPE.NR    |
|-------------|------------------|---|------------|------------|
| Ø           | 140 cm 55.1 inch |   |            |            |
| H           | 5 cm 2 inch      | 88x led E10, 12V/0.33W, 2600K, 2024 LM  | Nickel     | 11-9004-1E |
|             |                  |   | Brass      | 11-9004-2E |
|             |                  |   | Blackbrass | 11-9004-4E |
| CANOPY      |                  | INCLUDED  |            |            |
| Ø           | 20 cm 7.9 inch   |   |            |            |
| H           | 5 cm 2 inch      | Yes   |            |            |
| CABLELENGTH |                  |   |            |            |
| Up to       | 0 cm 59 inch     | <div><div>KG</div><div>6</div></div> <div><div>KG</div><div>21</div></div> <div><div></div><div>146x146x7cm</div></div> |            |            |

|                    |   |
|--------------------|---|
| TYPE               | suspended lamp  |
| STANDARD           | The rings are supplied with lamps on the outside. Transparent cable and black canopy with matching cover plate with the fixture. Leading and trailing edge dimmable |
| OPTIONAL           | Double light (lights inside and outside).<br>3000K or 3500K led.  |
| TRANSFORMER/DRIVER | SCPower KVF-12030-TDW   |
| DIMMING            | leading and trailing edge   |
| CLASSIFICATION     | UL no<br>IP20 yes   |

ENERGY LABEL

YEAR OF DESIGN

1997

---

Quasar Holland BV®

Burgstraat 2 4283GG Giessen The Netherlands

T. +31-(0)183-447887

info@quasar.nl www.quasar.nl