




POLLUX SUSPENSION

by Jan Pauwels

Pollux looks structured but still harmonious. Modular placed LED circuit boards and tiny metal rods are the only two basic elements of this light fixture. They give the lamp its structure and shape. The shape is totally irregular and asymmetrical. The circuit boards have leds on both sides. 2/3 of the light is going downwards and 1/3 is going upwards.

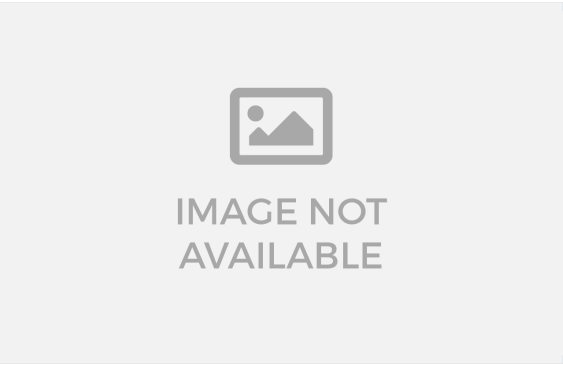

DIMENSIONS	LIGHTSOURCE	FINISH	TYPE.NR
L 50 cm 19.7 inch	183x led, 12V/0.6W,	Nickel	11-9205-1
H 100 cm 39.4 inch	2800K, 6960 LM, CRI>95	Brass	11-9205
W 50 cm 19.7 inch		Blackbrass	11-9205-4
CANOPY	INCLUDED		
L 25 cm 9.8 inch	Yes		
H 6 cm 2.4 inch			
W 25 cm 9.8 inch			
CABLELENGTH			
Up to 200 cm 78 inch			

TYPE	Suspension
STANDARD	
OPTIONAL	2400K.
TRANSFORMER/DRIVER	Meanwell HLG603
DIMMING	0-10V
CLASSIFICATION	UL no IP20 yes
ENERGY LABEL	
YEAR OF DESIGN	2019

Quasar Holland BV®

Burgstraat 2 4283GG Giessen The Netherlands
T. +31-(0)183-447887
info@quasar.nl www.quasar.nl