




POLLUX SUSPENSION

by Jan Pauwels

Pollux looks structured but still harmonious. Modular placed LED circuit boards and tiny metal rods are the only two basic elements of this light fixture. They give the lamp its structure and shape. The shape is totally irregular and asymmetrical. The circuit boards have leds on both sides. 2/3 of the light is going downwards and 1/3 is going upwards.

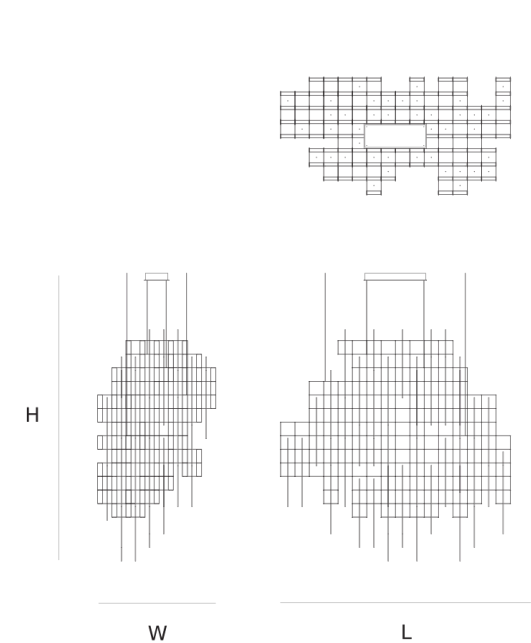

DIMENSIONS

L

205 cm80.7 inch

H

187 cm73.6 inch

W

105 cm41.3 inch

CANOPY

L

59.5 cm23.4 inch

H

10 cm3.9 inch

W

37 cm14.6 inch

CABLELENGTH

Up to 200 cm78 inch

LIGHTSOURCE

886x led 12V/0.6W,
2800K, 26580 LM,
CRI>95

INCLUDED

Yes

KG

14

KG

161

216x110x94cm

FINISH

Nickel

Brass

Blackbrass

11-9200

11-9200-2

11-9200-4

TYPE	Suspension
STANDARD	
OPTIONAL	2400K.
TRANSFORMER/DRIVER	Meanwell HLG600
DIMMING	0-10V
CLASSIFICATION	UL no IP20 yes
ENERGY LABEL	

Quasar Holland BV®

Burgstraat 2 4283GG Giessen The Netherlands

T. +31-(0)183-447887

info@quasar.nl www.quasar.nl