


Date: September 19th 2025

QUASAR



SUSPENSION by Jan Pauwels

Like bright stars in the galaxy the crystals are sparkling in this transparent structure.

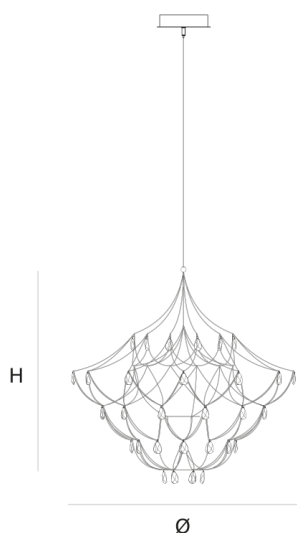

Ø	80 cm	31.5 inch
H	80 cm	31.5 inch

Ø	80 cm	31.5 inch
H	80 cm	31.5 inch

Ø	25 cm	9.8 inch
H	5 cm	2 inch

Ø	25 cm	9.8 inch
H	5 cm	2 inch

Up to 200 cm 78 inch

Up to 200 cm 78 inch

60x led E10, 12V/0.33W,
2600K, 1380 LM

60x led E10, 12V/0.33W,
2600K, 1380 LM

Yes

Yes



2



4



63x63x87cm

Nickel
Brass
Blackbrass

Nickel
Brass
Blackbrass

- 11-8500E
- 11-8500-2E
- 11-8500-4E

-  11-8500E
-  11-8500-2E
-  11-8500-4E

TYPE	Suspension
STANDARD	
OPTIONAL	Downlight led 2700K 12V – 3W. 3000K or 3500K led.
TRANSFORMER/DRIVER	SCPowder KVF-12030-TDW
DIMMING	leading and trailing edge
CLASSIFICATION	UL no IP20 yes
ENERGY LABEL	

Quasar Holland BV®

Burgstraat 2 4283GG Giessen The Netherlands

T. +31-(0)183-447887

info@quasar.nl www.quasar.nl