




CITADEL COMPOSITION

SUSPENSIONby Jan Pauwels

Pay attention of ordering separately the driver. Instead of fixing all cables to the ceiling, it is also possible to hang one ring to another ring. The suspension cables will also pass the current.

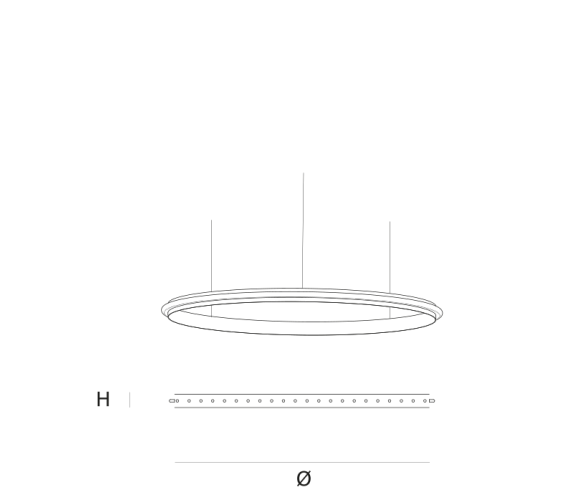

| DIMENSIONS | LIGHTSOURCE | FINISH | TYPE.NR |
|---------------------|--|------------|------------|
| Ø78 cm30.7 inch | 44x led E10, 12V/0.33W, | Nickel | 11-8280-1E |
| H5 cm2 inch | 2600K, 1012 LM | Brass | 11-8280-2E |
| | | Blackbrass | 11-8280-4E |
| CANOPY | INCLUDED | | |
| | Yes | | |
| CABLELENGTH | | | |
| Up to 150 cm59 inch | <div><div>KG1</div><div>KG13</div><div>106x106x7cm</div></div> | | |

| | |
|--------------------|--|
| TYPE | Suspension |
| STANDARD | The rings are supplied with lamps on the outside. Transparent nickel cable and ceiling fixations but without the driver! |
| OPTIONAL | Double light (lights inside and outside). 3000K or 3500K led. |
| TRANSFORMER/DRIVER | Order seperatly |
| DIMMING | depending the type of driver |
| CLASSIFICATION | UL no IP20 yes |

ENERGY LABEL

YEAR OF DESIGN

1997

Quasar Holland BV®

Burgstraat 2 4283GG Giessen The Netherlands

T. +31-(0)183-447887

info@quasar.nl www.quasar.nl